




## Hinged cover wiring troughs

The 1412 CH...IP hinged cover oil and dust tight troughs with inner panel are used indoors to protect the enclosed controls from dust, dirt, oil and water splashing. The box and cover are made from 16 GA steel with all seams continuously welded. The opening has a flange around all

sides which increases rigidity and ensures complete contact with the oil resistant high quality seamless poured gasket. The door is secured by convenient ¼ turn locks and can be opened over 180°. Internal mounting holes are provided and a wall mounting kit is supplied.

Enclosures and panels are finished with heat fused polyester powder, electrostatically applied on a pretreated base. Box is ANSI/ASA 61 gray.

**CSA Certified / UL Listed  
NEMA/EEMAC 4-12 / IP66**

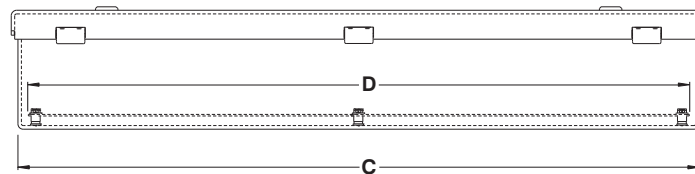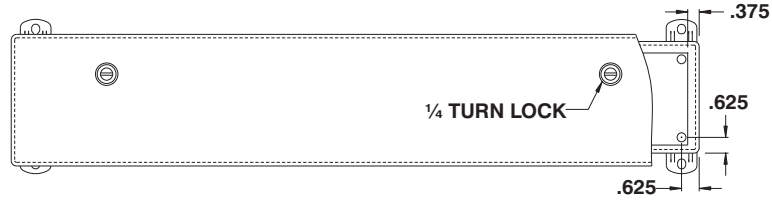

CATALOG NUMBER	DIMENSIONS					SHIP WGHT LBS.
	A	B	C	D	E	
1412 CH060424IP	6	4	24	21.88	2.88	12
1412 CH060436IP	6	4	36	33.88	2.88	18
1412 CH060448IP	6	4	48	45.88	2.88	23
1412 CH060460IP	6	4	60	57.88	2.88	29
1412 CH060472IP	6	4	72	69.88	2.88	34
1412 CH060612IP	6	6	12	9.88	4.88	8
1412 CH060618IP	6	6	18	15.88	4.88	12
1412 CH060624IP	6	6	24	21.88	4.88	15
1412 CH060630IP	6	6	30	27.88	4.88	19
1412 CH060636IP	6	6	36	33.88	4.88	22
1412 CH060648IP	6	6	48	45.88	4.88	29
1412 CH060660IP	6	6	60	57.88	4.88	36
1412 CH060672IP	6	6	72	69.88	4.88	42
1412 CH080524IP	8	5	24	21.88	3.88	16
1412 CH080536IP	8	5	36	33.88	3.88	23
1412 CH080548IP	8	5	48	45.88	3.88	30
1412 CH080560IP	8	5	60	57.88	3.88	37
1412 CH080572IP	8	5	72	69.88	3.88	44
1412 CH080812IP	8	8	12	9.88	6.88	12
1412 CH080824IP	8	8	24	21.88	6.88	21
1412 CH080836IP	8	8	36	33.88	6.88	30
1412 CH080848IP	8	8	48	45.88	6.88	38
1412 CH080860IP	8	8	60	57.88	6.88	47
1412 CH100636IP	10	6	36	33.88	4.88	28
1412 CH100648IP	10	6	48	45.88	4.88	36
1412 CH100660IP	10	6	60	57.88	4.88	45
1412 CH100672IP	10	6	72	69.88	4.88	53
1412 CH121224IP	12	12	24	21.88	10.88	32
1412 CH121236IP	12	12	36	33.88	10.88	46
1412 CH121248IP	12	12	48	45.88	10.88	59
1412 CH121260IP	12	12	60	57.88	10.88	72



Data subject to change without notice.



p.449

<http://www.exmweb.com>



p.442



p.462

1-800-363-2423

Fax : 450-979-4626



[info@exmweb.com](mailto:info@exmweb.com)