# Stainless steel hinged wiring troughs

**The 1412 CHSSP...IP stainless steel** hinged cover oil and dust tight troughs with inner panel are used indoors to protect the enclosed controls from dust, dirt, oil and water splashing. The box and cover are made from 16 GA steel with all seams continuously welded. The opening has a flange around all sides which increases rigidity and ensures complete contact with the oil resistant high quality seamless poured gasket. The door is secured by convenient ¼ turn locks and can be opened over 180°. Internal mounting holes are provided and a wall mounting kit is supplied. Enclosures and panels are finished with heat fused polyester powder, electrostatically applied on a pretreaded base. Box is ANSI/ASA 61 gray.

**CSA Certified / UL Listed**
**NEMA/EEMAC 4X / IP66**




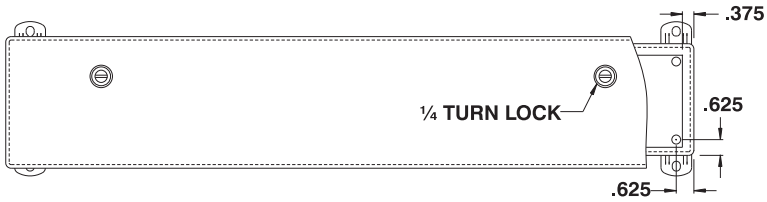


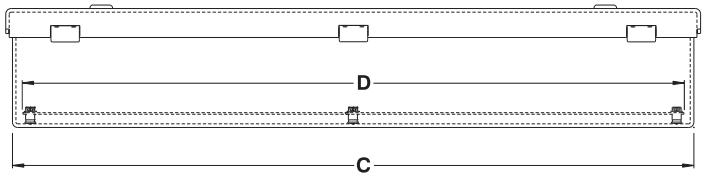

| CATALOG NUMBER | DIMENSIONS A | B | C | D | E | SHIP WGHT LBS. |
|---|---|---|---|---|---|---|
| 1412 CHSSP060424IP | 6 | 4 | 24 | 21.88 | 2.88 | 12 |
| 1412 CHSSP060436IP | 6 | 4 | 36 | 33.88 | 2.88 | 18 |
| 1412 CHSSP060448IP | 6 | 4 | 48 | 45.88 | 2.88 | 23 |
| 1412 CHSSP060460IP | 6 | 4 | 60 | 57.88 | 2.88 | 29 |
| 1412 CHSSP060472IP | 6 | 4 | 72 | 69.88 | 2.88 | 34 |
| 1412 CHSSP060612IP | 6 | 6 | 12 | 9.88 | 4.88 | 8 |
| 1412 CHSSP060618IP | 6 | 6 | 18 | 15.88 | 4.88 | 12 |
| 1412 CHSSP060624IP | 6 | 6 | 24 | 21.88 | 4.88 | 15 |
| 1412 CHSSP060630IP | 6 | 6 | 30 | 27.88 | 4.88 | 19 |
| 1412 CHSSP060636IP | 6 | 6 | 36 | 33.88 | 4.88 | 22 |
| 1412 CHSSP060648IP | 6 | 6 | 48 | 45.88 | 4.88 | 29 |
| 1412 CHSSP060660IP | 6 | 6 | 60 | 57.88 | 4.88 | 36 |
| 1412 CHSSP060672IP | 6 | 6 | 72 | 69.88 | 4.88 | 42 |
| 1412 CHSSP080524IP | 8 | 5 | 24 | 21.88 | 3.88 | 16 |
| 1412 CHSSP080536IP | 8 | 5 | 36 | 33.88 | 3.88 | 23 |
| 1412 CHSSP080548IP | 8 | 5 | 48 | 45.88 | 3.88 | 30 |
| 1412 CHSSP080560IP | 8 | 5 | 60 | 57.88 | 3.88 | 37 |
| 1412 CHSSP080572IP | 8 | 5 | 72 | 69.88 | 3.88 | 44 |
| 1412 CHSSP080812IP | 8 | 8 | 12 | 9.88 | 6.88 | 12 |
| 1412 CHSSP080824IP | 8 | 8 | 24 | 21.88 | 6.88 | 21 |
| 1412 CHSSP080836IP | 8 | 8 | 36 | 33.88 | 6.88 | 30 |
| 1412 CHSSP080848IP | 8 | 8 | 48 | 45.88 | 6.88 | 38 |
| 1412 CHSSP080860IP | 8 | 8 | 60 | 57.88 | 6.88 | 47 |
| 1412 CHSSP100636IP | 10 | 6 | 36 | 33.88 | 4.88 | 28 |
| 1412 CHSSP100648IP | 10 | 6 | 48 | 45.88 | 4.88 | 36 |
| 1412 CHSSP100660IP | 10 | 6 | 60 | 57.88 | 4.88 | 45 |
| 1412 CHSSP100672IP | 10 | 6 | 72 | 69.88 | 4.88 | 53 |
| 1412 CHSSP121224IP | 12 | 12 | 24 | 21.88 | 10.88 | 32 |
| 1412 CHSSP121236IP | 12 | 12 | 36 | 33.88 | 10.88 | 46 |
| 1412 CHSSP121248IP | 12 | 12 | 48 | 45.88 | 10.88 | 59 |
| 1412 CHSSP121260IP | 12 | 12 | 60 | 57.88 | 10.88 | 72 |

Data subject to change without notice.

p.449

p.449

p.462



http://www.exmweb.com ☎ 1-800-363-2423 Fax : 450-979-4626 info@exmweb.com