

# FILTER FANS

## Washdown filter fan system (NEMA 4/4X)




### Quick Features :

- Housing made of steel or stainless steel
- The steel fans are painted gray (custom colors available)
- The stainless steel fans are brushed
- The kits include the filter fan and the exhaust module
- For use in harsh environments, where the filter fan system may be subject to washdowns or for severe outdoor applications
- Electrostatically charged polypropylene filter traps particles as small as 10 microns
- Electric connection via a power cord (included)
- UL, cUL

### Technical Data :

Dimensions (H x W x D) : 457mm X 267mm X 127mm (imperial sizes on drawing)  
 Max. operating temperature : 55°C  
 Free blowing air volume : 263m<sup>3</sup>/h  
 Protection degree : NEMA 4 (steel units) / NEMA 4X (stainless steel units)

**In order to ensure the system's integrity the supplied gasket must be properly installed, as shown below. This filter fan system should be used exclusively with NEMA 4 or NEMA 4X cabinets.**

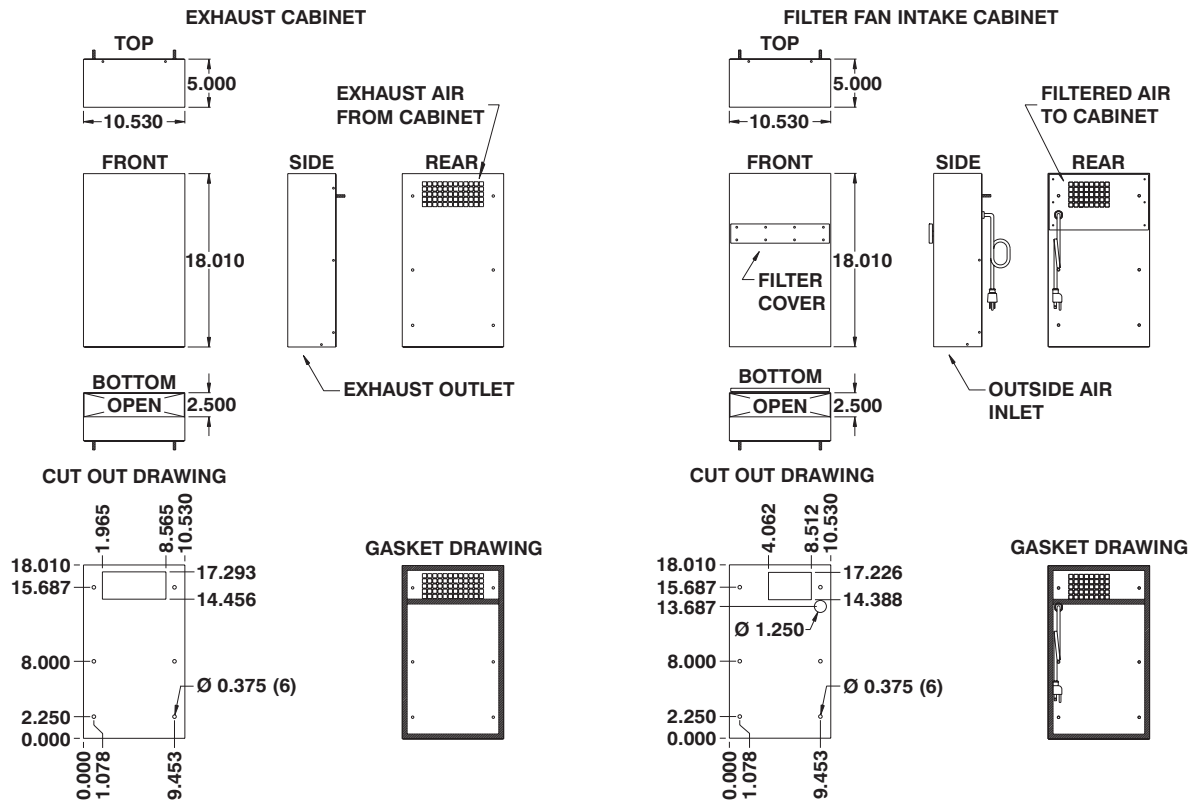

Data subject to change without notice.

CATALOG NUMBER †	VOLTAGE	MAX. AMPS	AIRFLOW DIRECTION	REPLACEMENT FILTER	HOUSING MATERIAL	SHIPPING WEIGHT
IQ150FPW-126	AC 115V	1.90A	Intake only	WFIL	Painted steel	31
IQ150FPW-236	AC 230V	0.75A	Intake only	WFIL	Painted steel	31
IQ150FPW-126-SC	AC 115V	1.90A	Intake only	WFIL	Stainless steel	31
IQ150FPW-236-SC	AC 230V	0.75A	Intake only	WFIL	Stainless steel	31

† Part numbers include the filter fan and the exhaust filter.