


## Quick Install Side Cover for Streamline cabinet

The 6100 SLCQ Streamline quick install side cover is installed on the side of a Streamline or Mtrx cabinet frame. This cover is supplied standard with all installation

hardware. The cover is hooked and locked by its top flange and fixed in place by lower latches. This rear cover does not have any gasket for sealing.

Construction is steel. Standard finish is powder coated RAL7035 textured light gray or textured black RAL9005.

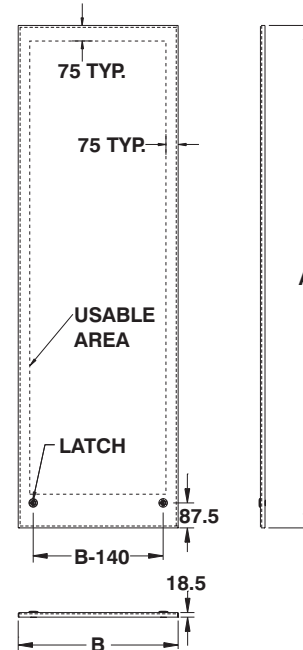

CATALOG NUMBER	NOMINAL		DIMENSIONS	
	H	W	A	B
6100 SLCQ0704	700	400	660	360
6100 SLCQ0705	700	500	660	460
6100 SLCQ0706	700	600	660	560
6100 SLCQ0708	700	800	660	760
6100 SLCQ0709	700	900	660	860
6100 SLCQ0710	700	1000	660	960
6100 SLCQ0711	700	1100	660	1060
6100 SLCQ0712	700	1200	660	1160
6100 SLCQ1404	1400	400	1360	360
6100 SLCQ1405	1400	500	1360	460
6100 SLCQ1406	1400	600	1360	560
6100 SLCQ1408	1400	800	1360	760
6100 SLCQ1409	1400	900	1360	860
6100 SLCQ1410	1400	1000	1360	960
6100 SLCQ1411	1400	1100	1360	1060
6100 SLCQ1412	1400	1200	1360	1160
6100 SLCQ1604	1600	400	1560	360
6100 SLCQ1605	1600	500	1560	460
6100 SLCQ1606	1600	600	1560	560
6100 SLCQ1608	1600	800	1560	760
6100 SLCQ1609	1600	900	1560	860
6100 SLCQ1610	1600	1000	1560	960
6100 SLCQ1611	1600	1100	1560	1060
6100 SLCQ1612	1600	1200	1560	1160

CATALOG NUMBER	NOMINAL		DIMENSIONS	
	H	W	A	B
6100 SLCQ1804	1800	400	1760	360
6100 SLCQ1805	1800	500	1760	460
6100 SLCQ1806	1800	600	1760	560
6100 SLCQ1808	1800	800	1760	760
6100 SLCQ1809	1800	900	1760	860
6100 SLCQ1810	1800	1000	1760	960
6100 SLCQ1811	1800	1100	1760	1060
6100 SLCQ1812	1800	1200	1760	1160
6100 SLCQ2004	2000	400	1960	360
6100 SLCQ2005	2000	500	1960	460
6100 SLCQ2006	2000	600	1960	560
6100 SLCQ2008	2000	800	1960	760
6100 SLCQ2009	2000	900	1960	860
6100 SLCQ2010	2000	1000	1960	960
6100 SLCQ2011	2000	1100	1960	1060
6100 SLCQ2012	2000	1200	1960	1160
6100 SLCQ2204	2200	400	2160	360
6100 SLCQ2205	2200	500	2160	460
6100 SLCQ2206	2200	600	2160	560
6100 SLCQ2208	2200	800	2160	760
6100 SLCQ2209	2200	900	2160	860
6100 SLCQ2210	2200	1000	2160	960
6100 SLCQ2211	2200	1100	2160	1060
6100 SLCQ2212	2200	1200	2160	1160

For side cover to be installed in pair (right & left) add suffix 'P'  
 For side cover to be specifically installed on right side (facing cabinet) add suffix 'R'  
 For side cover to be specifically installed on left side (facing cabinet) add suffix 'L'  
 For side cover to be finished textured black RAL9005 add suffix 'X'

i.e.: 6100 SLCQ1806L → Side cover to be installed on left side  
 6100 SLCQ1806RX → Side cover to be installed on right side and painted textured black RAL9005

Data subject to change without notice.

