
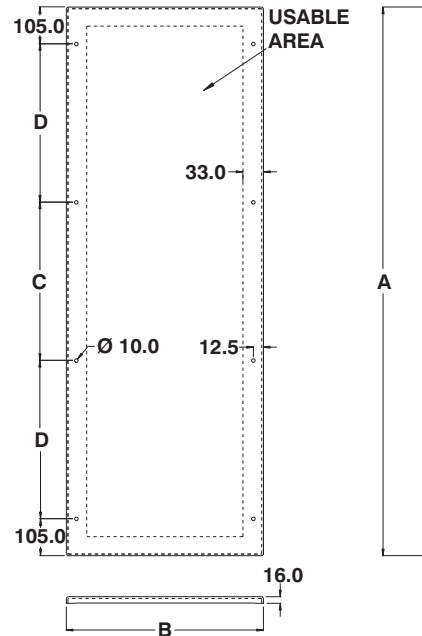


Solid side cover

The 6500 MXC side covers are made to be installed on the sides of a Mtrx cabinet. They are made of steel or stainless steel. The 6500 MXC consists of one side cover, and mounting hardware. **If side covers are required for**

both sides of the cabinet, two 6500 MXC must be ordered. A quality robotically poured-in place gasket ensures a complete and durable seal. The covers are finished with heat fused polyester powder, electrostatically applied

on a phosphatized base. Finish is RAL7035 textured light gray. **Note: Side covers are not included with the cabinet kit (6500 MXK) and must be ordered separately.**

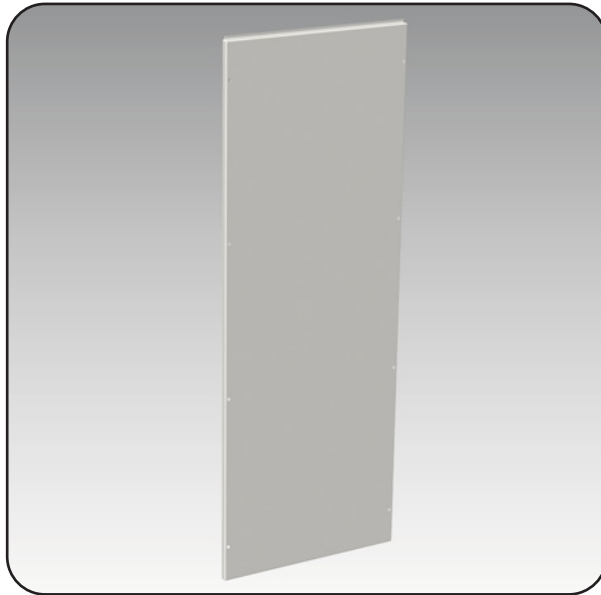

CATALOG NUMBER	NOMINAL		DIMENSIONS			
	H	D	A	B	C	D
6500 MXC0706	700	600	660	560	-	-
6500 MXC0708	700	800	660	760	-	-
6500 MXC0709	700	900	660	860	-	-
6500 MXC0710	700	1000	660	960	-	-
6500 MXC0712	700	1200	660	1160	-	-
6500 MXC1404	1400	400	1360	360	450	350
6500 MXC1405	1400	500	1360	460	450	350
6500 MXC1406	1400	600	1360	560	450	350
6500 MXC1408	1400	800	1360	760	450	350
6500 MXC1409	1400	900	1360	860	450	350
6500 MXC1410	1400	1000	1360	960	450	350
6500 MXC1412	1400	1200	1360	1160	450	350
6500 MXC1604	1600	400	1560	360	450	450
6500 MXC1605	1600	500	1560	460	450	450
6500 MXC1606	1600	600	1560	560	450	450
6500 MXC1608	1600	800	1560	760	450	450
6500 MXC1609	1600	900	1560	860	450	450
6500 MXC1610	1600	1000	1560	960	450	450
6500 MXC1612	1600	1200	1560	1160	450	450
6500 MXC1804	1800	400	1760	360	500	525

CATALOG NUMBER	NOMINAL		DIMENSIONS			
	H	D	A	B	C	D
6500 MXC1805	1800	500	1760	460	500	525
6500 MXC1806	1800	600	1760	560	500	525
6500 MXC1808	1800	800	1760	760	500	525
6500 MXC1809	1800	900	1760	860	500	525
6500 MXC1810	1800	1000	1760	960	500	525
6500 MXC1812	1800	1200	1760	1160	500	575
6500 MXC2004	2000	400	1960	360	600	575
6500 MXC2005	2000	500	1960	460	600	575
6500 MXC2006	2000	600	1960	560	600	575
6500 MXC2008	2000	800	1960	760	600	575
6500 MXC2009	2000	900	1960	860	600	575
6500 MXC2010	2000	1000	1960	960	600	575
6500 MXC2012	2000	1200	1960	1160	600	575
6500 MXC2205	2200	500	2160	460	650	650
6500 MXC2206	2200	600	2160	560	650	650
6500 MXC2208	2200	800	2160	760	650	650
6500 MXC2209	2200	900	2160	860	650	650
6500 MXC2210	2200	1000	2160	960	650	650
6500 MXC2212	2200	1200	2160	1160	650	650

For left side installation add suffix 'L'
 for right side installation add suffix 'R'
 For purchase of pair (Right and Left) add suffix 'P'

i.e.: 6500 MXC1806L → Side cover installed on Left
 6500 MXC1806R → Side cover installed on Right
 6500 MXC1806P → Pair of side covers installed

Data subject to change without notice.

