


Oil & dust tight multi-door enclosures

The 5500 MD multi-door, oil and dust tight enclosures are used indoors for protection against dirt, dust and oil. The boxes are made from quality code gauge steel, with all seams continuously welded. Body stiffeners are provided to increase rigidity. Sets of double doors and single doors are separated by center posts. The sets of double doors do not have a center post, but the left hand door is flanged and the oil tight padlockable handle is on the right hand door. The single doors also have padlockable handles and the hinges are on the left. A high quality robotically poured-in-place gasket ensures a complete

and durable oil and dust tight seal. The heavy duty die cast hinges have captive hinge pins which permit 180° door opening. The three door enclosures have one set of double doors with a 78"X70" inner panel and one single door with a 78"X34" inner panel. The four door enclosures have two sets of double doors with two 78"X70" inner panels. The 5 door enclosures have two sets of double doors with two 78"X70" inner panels and one single door with a 78"X34" inner panel. An interlock is installed to ensure that the left hand doors (slaves) can only be opened if the right hand door (master) is open.

The inner panels are made of painted white steel and mounts on M10 welded studs. Lifting eye-bolts and provisions for mounting fluorescent fixtures are provided. The mechanical interlock mechanism uses the right hand door as the master and allows users to close the doors in any order. A print pocket is also provided. Enclosures and panels are finished with heat fused polyester powder, electrostatically applied on a pretreated base. Box is ANSI/ASA 61 gray.


CSA Certified / UL Listed
NEMA/EEMAC 12-13 / IP65

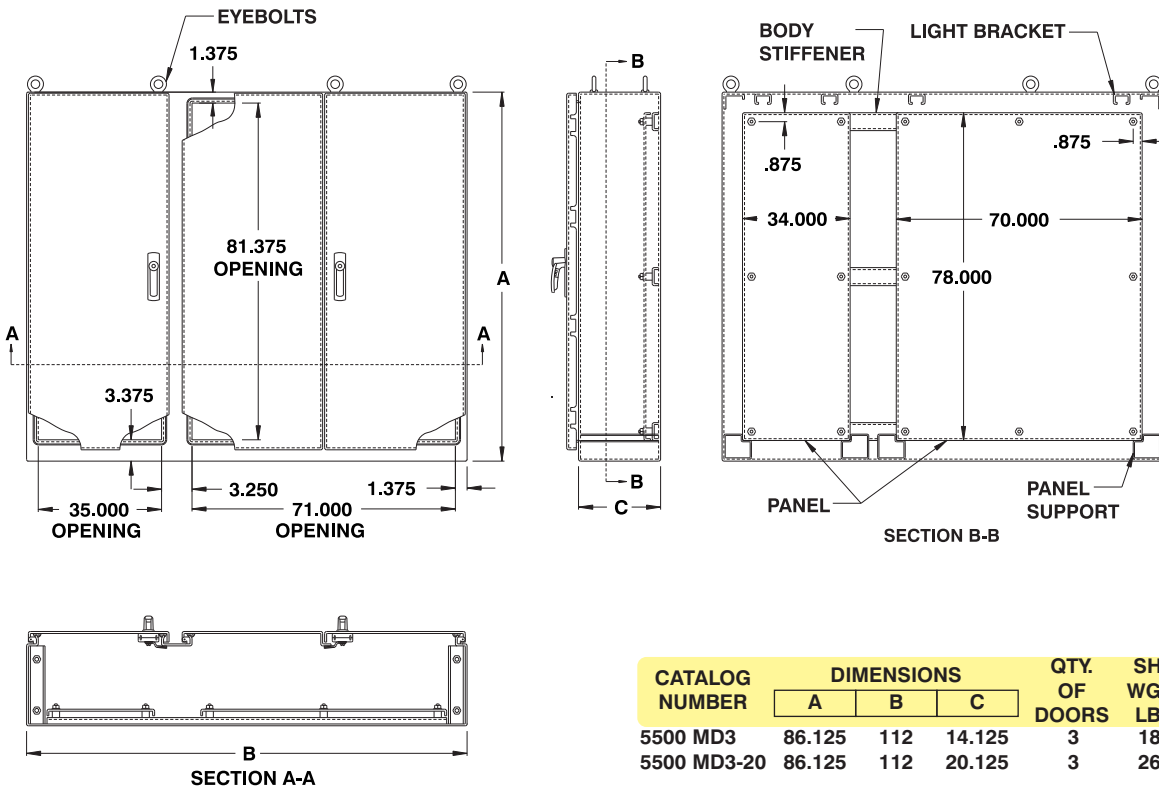

Data subject to change without notice.



p.482



p.479



p.466



p.484



p.463




p.494



p.462

Oil & dust tight quad-door enclosures

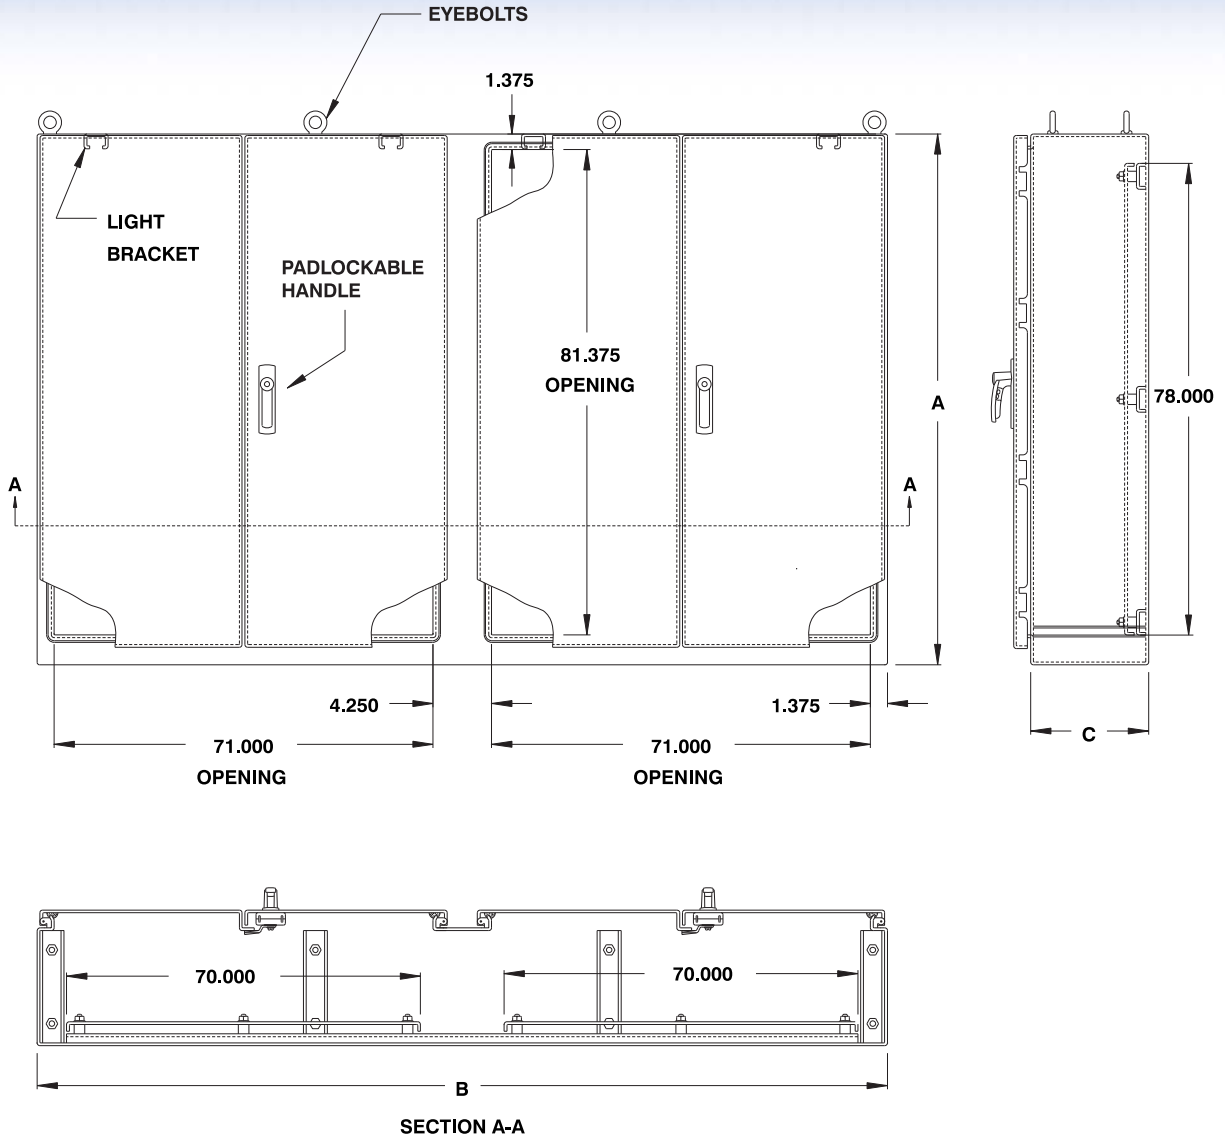

CATALOG NUMBER	DIMENSIONS			QTY. OF DOORS	SHIP WGHT LBS.
	A	B	C		
5500 MD4	86.125	149	14.125	4	2270
5500 MD4-20	86.125	149	20.125	4	3240

Data subject to change without notice.



p.482
<http://www.exmweb.com>

p.479

p.466

p.484

p.463

p.494

p.462

1-800-363-2423

Fax : 450-979-4626




info@exmweb.com

NEMA 12-13 ENCLOSURES

5500 MD5

Oil & dust tight quintuple door enclosures

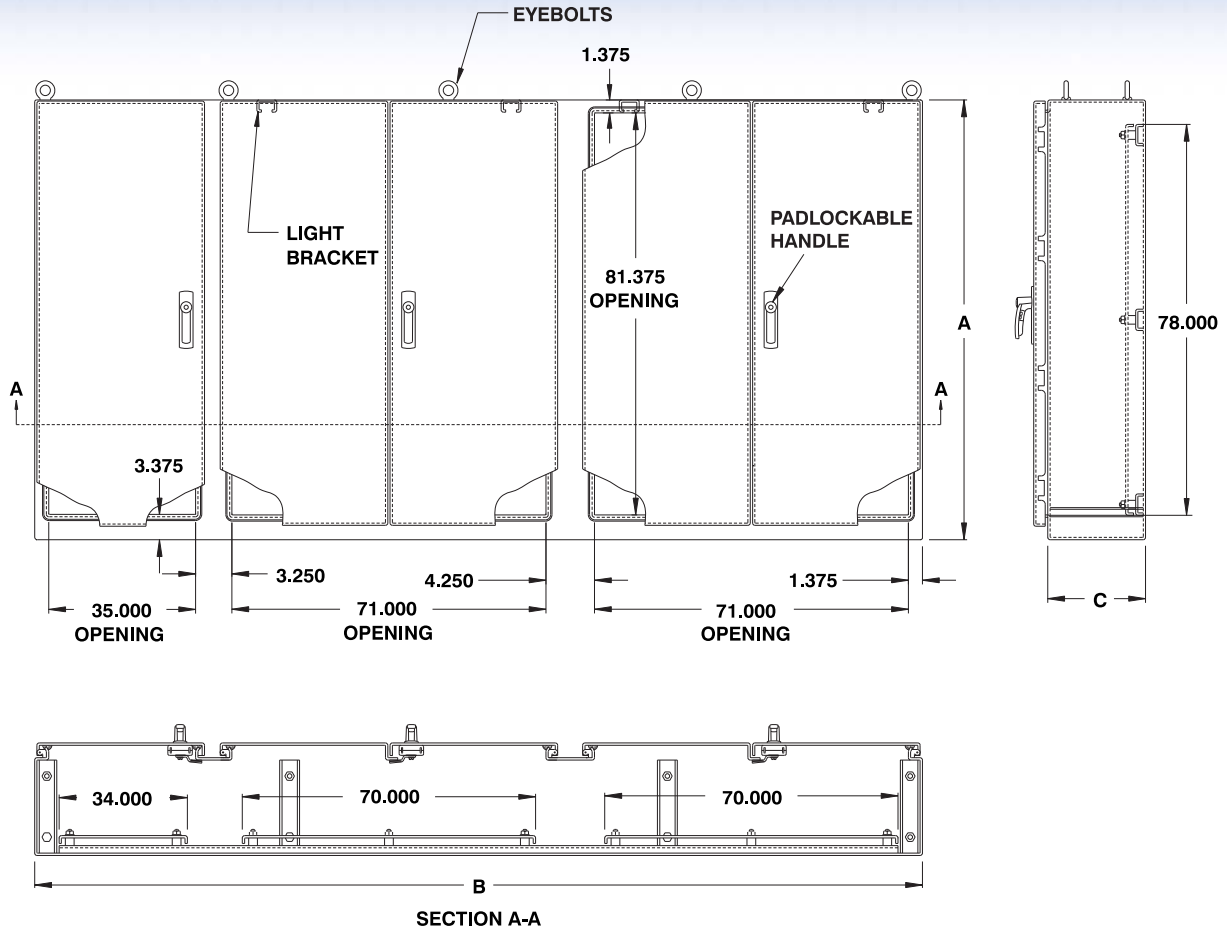

CATALOG NUMBER	DIMENSIONS			QTY. OF DOORS	SHIP WGHT LBS.
	A	B	C		
5500 MD5	86.125	187	14.125	5	2900
5500 MD5-20	86.125	187	20.125	5	4140

Data subject to change without notice.


270



<http://www.exmweb.com>



p.482



p.479



p.466



p.484



p.463



p.494



p.462

1-800-363-2423

Fax : 450-979-4626

info@exmweb.com