


Stainless steel free standing enclosure

The 9412 SS water, oil & dust tight enclosures are used indoors or outdoors in areas where the enclosures may be subject to hosing or to water coming from any direction or for protection against dust, dirt or oil splashing. The 9412 SS are made from quality code gauge (type 304) stainless steel, with corner seems continuously welded. The opening has a curled lip around all sides to prevent dripping water from

entering the enclosure when the door is open, it also increases rigidity. A high quality robotically poured-in-place seamless gasket ensures a complete and durable water tight seal. The pins of the concealed hinges can be pulled out to remove the door. Quarter turn locking mechanisms on three sides of the door ensure positive closing. Optional back panels can be mounted at any depth, using the three sets of rails

welded on the sides of the cabinet. Side panels can also be ordered separately. A print pocket is provided. The enclosures' exterior are unpainted and brushed smooth. The enclosures' interior and panels are finished with white heat fused polyester powder, electrostatically applied on a pretreated base.

CSA Certified / UL Listed
NEMA/EEMAC 4X / IP66

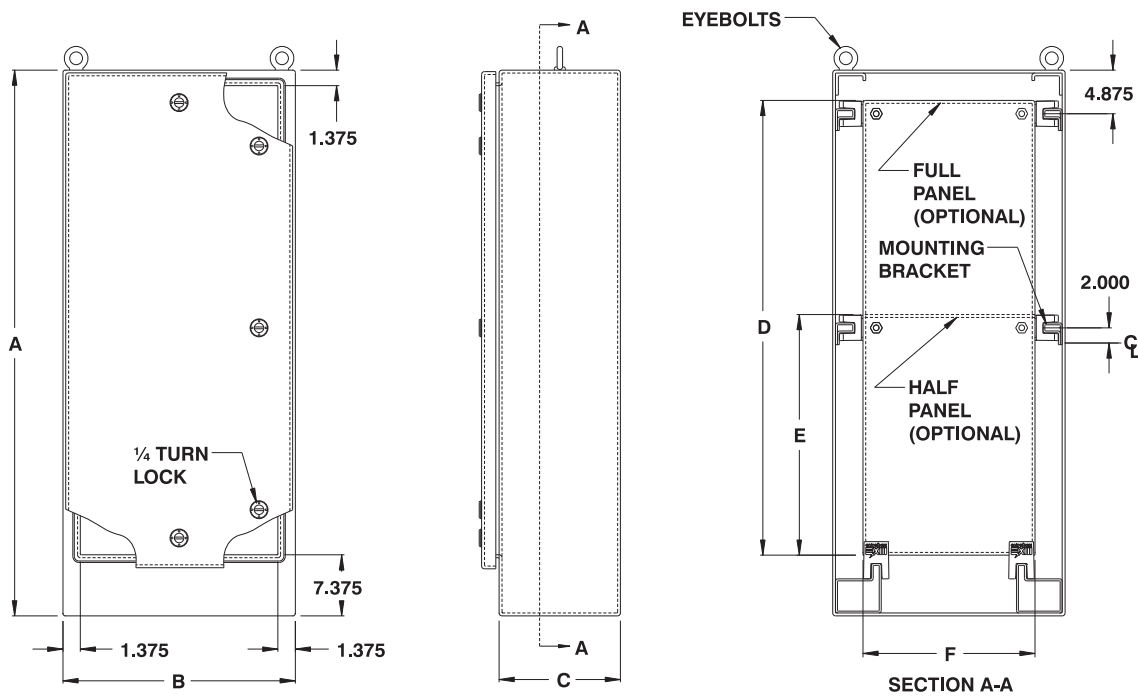

CATALOG NUMBER	DIMENSIONS						EQUIPMENT PANEL		SHIP WGHT LBS.
	A	B	C	D	E	F	FULL	HALF	
9412 SS722418	72	24	18	60	30.875	20	889 FP7224	889 HP7224	258
9412 SS723024	72	30	24	60	30.875	26	889 FP7230	889 HP7230	347
9412 SS723624	72	36	24	60	30.875	32	889 FP7236	889 HP7236	383
9412 SS902420	90	24	20	78	39.875	20	889 FP9024	889 HP9024	355
9412 SS903624	90	36	24	78	39.875	32	889 FP9036	889 HP9036	390
9412 SS903636	90	36	36	78	39.875	32	889 FP9036	889 HP9036	443

† For stainless steel type 316, add suffix '6' to the catalog number (ie. 9412 SS9036246).

‡ For painted stainless steel, add suffix 'P' to the catalog number (ie. 9412 SS722418P).



Data subject to change without notice.

p.461	p.463	p.466	p.484	p.480	p.442	p.449
http://www.exmweb.com			1-800-363-2423		Fax : 450-979-4626	



info@exmweb.com